


Macrylex Resin Chip Elevator Flooring

Endura Resin Chips are a decorative floor option that provides anti-slip proprieties and additional topcoat protection for your Macrylex elevator floor system.


Endura Resin Chips may be broadcast a variety of ways for stronger or lighter texture effects. When paired with the various bodycoat color options, multiple unique floor textures and colors can be realized.

All the Key Features of Macrylex and:

- Can be designed for slip-resistance
- Additional color options
- A unique flooring surface can be achieved by adjusting the volume of chips broadcast.

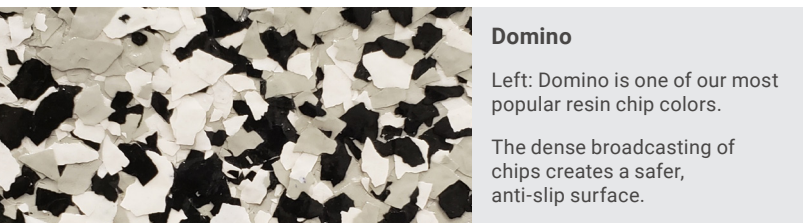

Macrylex Resin Chip Color Selector



Creekbed




Domino




Orbit



Outback



Safari




Shoreline




Snowfall



Terrier



Wombat



Woodland

Did you know?

Endura Resin Chips are also Ideal for garages, basements, auto showrooms, corridors, and all light to heavy traffic areas. Contact duraamen to learn more.



Elevator Floor Systems

Macrylex: Floor Coatings for Freight Elevators


Nearly Indestructible Macrylex Flooring

The most hard-wearing flooring option

Macrylex is widely used for indoor/outdoor service elevators. Its semi-flexible configuration allows it to withstand impacts and freeze-thaw conditions. It's perfect for use in freight elevators, high-volume passenger elevators, manufacturing facility elevators, parking garage elevators and outdoor lifts. Macrylex Flooring Systems will take-on abuse from high volume traffic and heavy machinery loads.

Engineered to Perform

- High wear, impact, and abrasion-resistant
- Very low maintenance
- May be finished with decorative quartz or resin chip designs
- Optional slip-resistant finish
- Use over wide temperature range—even below freezing
- Superior bond strength to the substrate

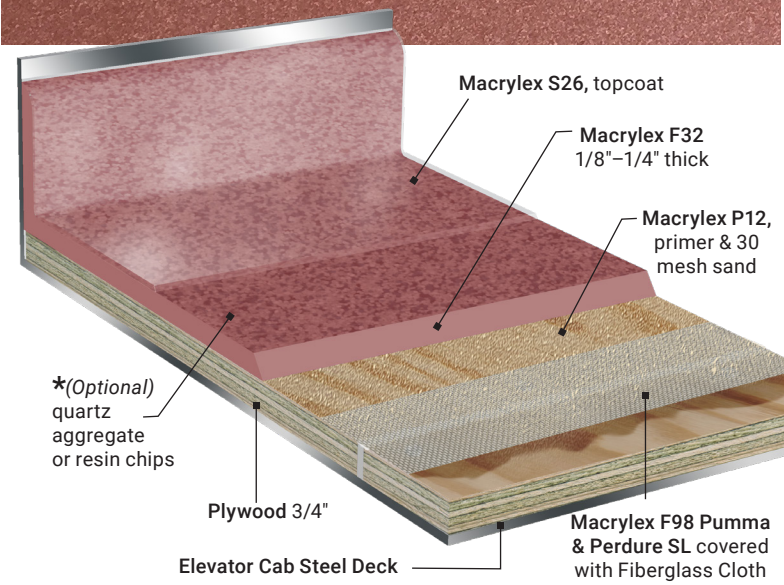

Duraamen’s Macrylex MMA floor system is the most incredibly durable and easy to install floor coating imaginable. The application of fresh Macrylex resin with the appropriate topcoat, creates a surface that almost nothing can effect. There is no substrate preparation needed, and existing floor material does not need to be removed, make for a fast installation and a quick return-to-service.

➤ **The Super floor**
Macrylex is not affected by temperature and has the highest bond strength of nearly any other floor coating. In addition to its bonding power, Macrylex is uncommonly flexible. These properties enable Macrylex to withstand freeze-thaw cycles, impacts, abrasions and heavy traffic of all types.

➤ **Upkeep**
Maintenance is ultra-minimal with these herculean floors. They’re impervious and waterproof. Liquids, solids, and oils do not affect Macrylex. Slip-resistance is customizable, as is the thickness of the coating.

➤ **Design & Safety**
Several hues of colored resin chips, quartz granules, and pigments (including industrial safety colors) are available. Resin chips and quartz granules add anti-slip properties to the coating, the degree to which depends on the installation method.

Macrylex Elevator Flooring



Key Features


- Superior bond strength to the substrate
- Wear, impact, and abrasion resistant
- Flexible
- Reduces noise created by mechanical vibration
- Applied at a thickness of 1/8" to 1/4"
- Install over wide temperature range—even below freezing
- Rapid cure with short recoat time (60 min)
- Can be broadcast with quartz or resin chips
- Very low maintenance

Macrylex Quartz Elevator Flooring









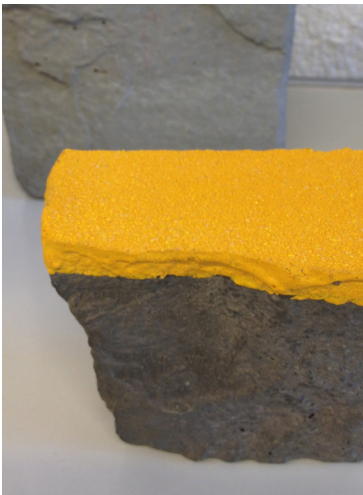






To enhance the aesthetics and strength, or to add anti-slip properties to your Macrylex floor, consider choosing the Macrylex Quartz Flooring System. Macrylex quartz flooring consists of broadcasting Duraamen’s Kwortz (colored quartz granules) in the still wet coating resulting in an anti-slip floor with additional surface protection. Kwortz may also be blended with the bodycoat for aesthetic value and added floor strength.

All the Key Features of Macrylex and:

- Improved wear, impact and abrasion resistance
- Slip-resistant finish
- Beautiful quartz finish
- Additional color options




Macrylex Bodycoat Color Selector
















		
gem gray	dark gray	light gray
		
charcoal	slate blue	deep blue
		
mocha	tan	pale buff
		
white sand	taupe	
		
colonial green	brick red	
		
terra cotta	safety yellow	

Color Theory.

‘Safety yellow’ and ‘deep blue’ are designed for industrial and manufacturing usage. The other colors can be used in any functional or decorative MMA floor coating project.



Macrylex Quartz Color Selector

		
oceana	reef	sage
		
mint	storm cloud	tweed
		
quarry	timberwolf	slate
		
ocean wave	fog	
		
incan gold	cheyenne	
		
sable	camel	

Safety first.

For the safest anti-slip flooring Kwortz should be double-broadcast over the wet Macrylex.

